



ERA - 2C

LED 24V - 11W/m




- IT** **Lampada senza interruttore** - Profilo in alluminio ossidato per installazione da incasso e schermo frangiluce con bordo di contenimento della fresata in policarbonato opalino.
- EN** **Lamp without switch** - Oxidized aluminium profile for recessed mounting and opaline polycarbonate anti-glare screen with protruding border to cover the milling.
- DE** **Leuchte ohne Schalter** - Einbauprofil aus eloxiertem Aluminium, Blendschutz-Abdeckung und Abdeckung aus Polykarbonat (opalen).

114/122 lm/W PHOTOBIOLOGICAL CLASS 0 CRI>80

CE IP40

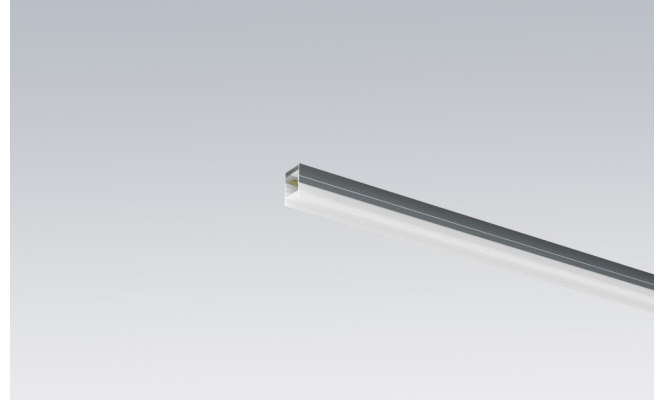

6010001
Clip di fissaggio (opzionale)
Fixing clip (optional)
Befestigungsclip (optional)

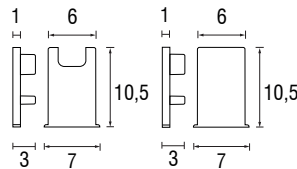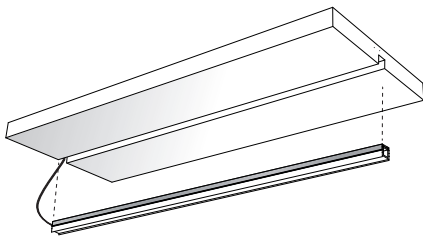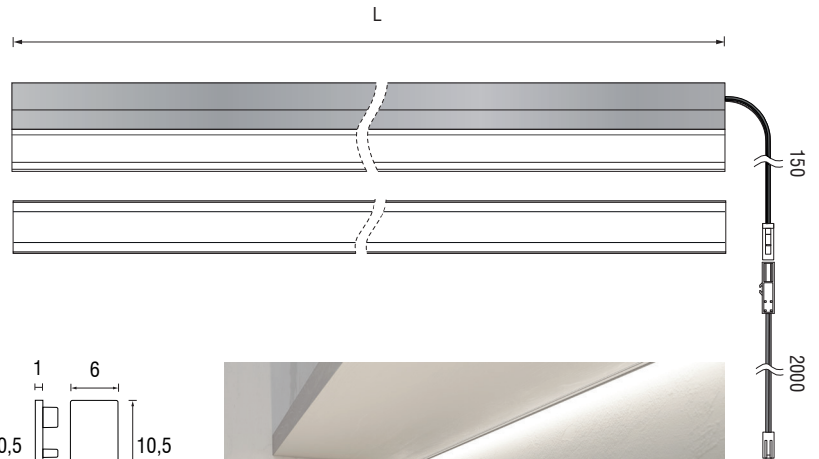

601T005 **601T005C**
Tappi (opzionale) Tappi chiusi (opzionale)
Terminals (optional) Closed terminals (optional)
Verschlüsse (optional) Verschlüsse (optional)



L	3000 K		4000 K	
min - max	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC
300 - 3000	101C201	A+	101C202	A+

Esclusivamente su misura - Custom measures only - Nur maßgeschneiderte

ERA-2C LED 24V-11W/m		LUX
mm	90°	
250	Ø 700	600
500	Ø 1500	190
750	Ø 2200	125
1000	Ø 3000	65

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore
Connector / Verbindungsstecker

