

# microGEO




LED 24V - 12W/m

- IT** **Lampada senza interruttore** - Profilo in alluminio ossidato per incasso completo di schermo in policarbonato opalino e molle di fissaggio.
- EN** **Lamp without switch** - Oxidized aluminium profile for flush mounting complete with opaline polycarbonate screen and fixing clips.
- DE** **Leuchte ohne Schalter** - Einbauprofil aus eloxiertem Aluminium mit Abdeckung aus Polykarbonat (opalen) Befestigungsclips.



60-65 lm/W PHOTOBIOLOGICAL  
CLASS 0 CRI>80

CE ENEC IP20

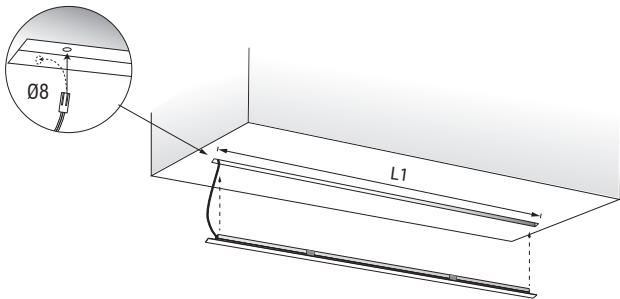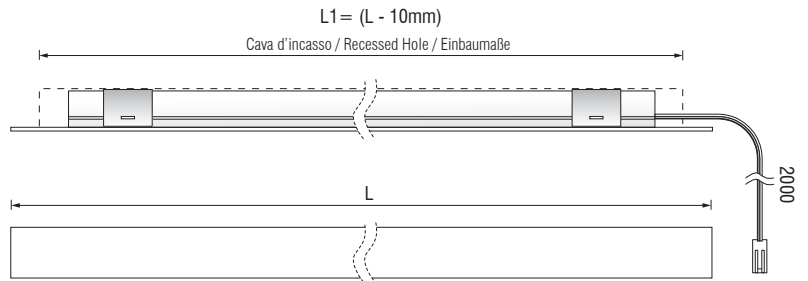

L	W	3000 K		4000 K		Imballo - Packaging - Verpackung		
		Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
385	4,20W	175M0385W3B12	A+	175M0385N3B12	A+	1	0,140	30 x 35 x 600
435	4,80W	175M0435W3B12	A	175M0435N3B12	A+	1	0,150	30 x 35 x 600
535	6,00W	175M0535W3B12	A	175M0535N3B12	A	1	0,165	30 x 35 x 600
735	8,40W	175M0735W3B12	A	175M0735N3B12	A	1	0,225	30 x 35 x 1000
835	9,60W	175M0835W3B12	A	175M0835N3B12	A	1	0,245	30 x 35 x 1000
935	10,80W	175M0935W3B12	A	175M0935N3B12	A	1	0,265	30 x 35 x 1000
1135	13,20W	175M1135W3B12	A	175M1135N3B12	A	1	0,320	30 x 35 x 1200

microGEO 535mm LED 24V-19W		LUX 3000K 4000K
mm	100°	
250	Ø 850	1500
500	Ø 1750	1600
750	Ø 2650	500
1000	Ø 3550	550
		250
		140
		140

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
Connector / Verbindungsstecker

