

microGEO




LED 24V - 19W/m

- IT** **Lampada senza interruttore** - Profilo in alluminio ossidato per incasso completo di schermo in policarbonato opalino e molle di fissaggio.
- EN** **Lamp without switch** - Oxidized aluminium profile for flush mounting complete with opaline polycarbonate screen and fixing clips.
- DE** **Leuchte ohne Schalter** - Einbauprofil aus eloxiertem Aluminium mit Abdeckung aus Polykarbonat (opalen) Befestigungsclips.



75-80 lm/W PHOTOBIOLOGICAL CLASS 0 CRI>80

CE ENEC 05 IP20

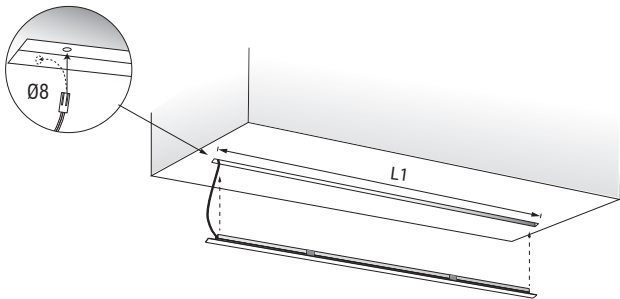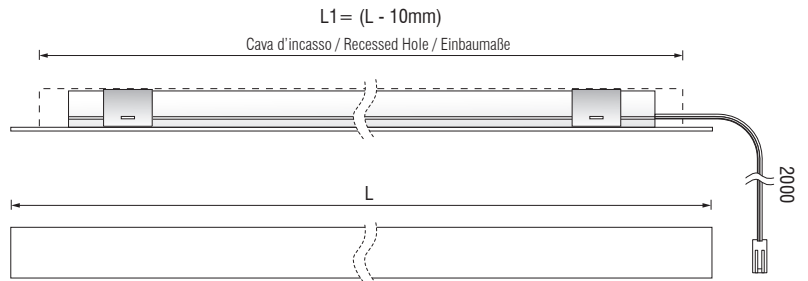

L	W	3000 K		4000 K		Imballo - Packaging - Verpackung		
		Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
385	6,65W	175M0385W3	A+	175M0385N3	A+	1	0,140	30 x 35 x 600
435	7,60W	175M0435W3	A+	175M0435N3	A+	1	0,150	30 x 35 x 600
535	9,50W	175M0535W3	A+	175M0535N3	A+	1	0,160	30 x 35 x 600
735	13,30W	175M0735W3	A	175M0735N3	A+	1	0,225	30 x 35 x 1000
835	15,20W	175M0835W3	A	175M0835N3	A	1	0,245	30 x 35 x 1000
935	17,10W	175M0935W3	A	175M0935N3	A	1	0,265	30 x 35 x 1000
1135	20,90W	175M1135W3	A	175M1135N3	A	1	0,320	30 x 35 x 1200

microGEO 535mm LED 24V-19W		LUX
		3000K
		4000K
mm	100°	1500
250	Ø 850	1600
500	Ø 1750	500
750	Ø 2650	550
1000	Ø 3550	250
		140
		140

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
 Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore
 Connector / Verbindungsstecker

